

- ➔ Zoom Lens/Motorized Lens with Auto Focus Function
- ➔ Wide Dynamic Range (WDR) 120db
- ➔ Dual IRIS Support (Auto-IRIS & P-IRIS)
- ➔ Remote Zoom/Focus /IRIS Control on AF Lens
- ➔ Triple Power Support (PoE/DC12V/AC24V)
- ➔ Quick Connection Mounting
- ➔ IR LED built in
- ➔ IP66 and IK10
- ➔ Extended temperature range up to 65°C



## Technical Specifications


### MOBOTIX MOVE VandalDome VD-4-IR

#### Product Features:

- Multiple Progressive Scan CMOS Sensor Support with 4MP Resolution
- Multi Exposure WDR
- Multi Codec Support (H.264/MJPEG)
- Low Latency Streaming
- Triple Stream Support
- True Day/Night Function (ICR)
- IR LED (Working Distance up to 30 m)
- 3D Motion Compensated Noise Reduction (MCTF)
- Smart Event Function: External Output/Motion Detection/Network Failure Detection/Tampering Alarm/Periodical Event/Manual Trigger/Audio Detection
- Text Overlay and Privacy Masks
- Micro SD/SDHC/SDXC Card Support
- ONVIF Profile S/G Support
- Smart Low Bitrate Control
- Weatherproof (IP66)
- Vandal Proof (IK10 Rating)
- Zero-Down-Time (ZDT) Power Switching

### Auto Focus

The MOBOTIX MOVE VandalDome VD-4-IR can perform fast, reliable auto focus and can adapt to different indoor and outdoor scenes through its unique algorithm. As auto focus can be done by camera itself, no on-site focus adjustment is required.

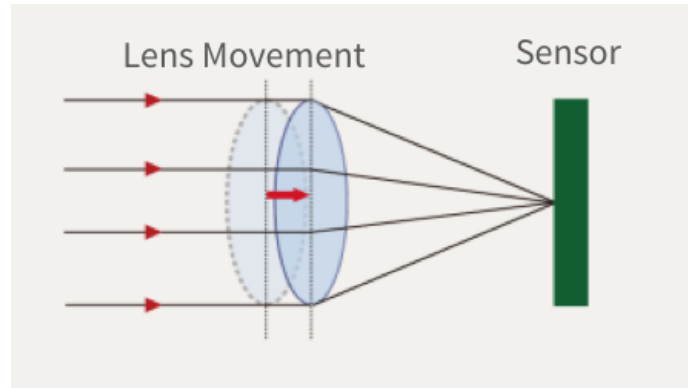

### IK10 Rating

The MOBOTIX MOVE VandalDome VD-4-IR is protected against punishing weather, vandals, vibration and shock. Its durability translates into better reliability and usability by reducing maintenance time.

### MOBOTIX MOVE VandalDome VD-4-IR – Specification:

MOBOTIX MOVE VandalDome VD-4-IR		
MOBOTIX Order Number	Mx-VD1A-4-IR	
Image Sensor	4MP 1/3" Progressive CMOS	
Effective Pixels	H x V = 2688 x 1520 (4MP)	
Pixel Size	2.0 µm	
Frame Rate (Maximum)	H.264: WDR 4MP@30fps + d1@30fps	
	MJPEG: 1080p@30fps	
Lens		
Minimum Illumination	Color	0.1 lux
	B/W	0.01 lux
Lens	Zoom Lens	Focus, Zoom, P-Iris, Auto-Iris, F1.7
	Focal Length	3 to 9 mm
	Horizontal (Field of View)	103° (Wide), 35° (Tele)
	Vertical (Field of View)	53° (Wide), 23° (Tele)

## Technical Specifications: VandalDome VD-4-IR

Camera	
Day and Night	Automatically removable IR-cut Filter
Shutter Time	1 to 1/10K sec.
WDR	Yes
EIS	No
Zoom	Optical Zoom, Digital Zoom ready by Lens Type
Image Settings	Color, Brightness, Sharpness, Contrast White Balance, Exposure Control 2DNR, 3DNR, NR by Motion Masking, Text Overlay
Corridor Mode	90°, 180°, 270° Rotation
Video Codec	
Compression	H.264/MJPEG
Streaming	Up to 4 individually configurable Streams in H.264/MJPEG Configurable Resolution/Frame Rate/Bandwidth LBR/VBR/CBR in H.264
Audio Codec	
Compression	G.711/G.726/AAC/LPCM
Streaming	2-Way
Audio Input	Line in
Audio Output	Line out
Network	
Interface	10/100 Mbps Ethernet
Security	User Authentication/HTTPS/IP Filter/IEEE 802.1x
Supported Protocols	ARP, PPPoE, IPv4/v6, ICMP, IGMP, QoS, TCP, UDP, DHCP, UPnP, SNMP, SMTP, RTP, RTSP, HTTP, HTTPS, FTP, NTP, DDNS
ONVIF	Profile S/G conformant
System Integration	
Analytics	Motion Detection/Tampering/Audio Detection
Event Triggers	External Input, Analytics, Network Failure Detection, Periodical Event, Manual Trigger
Event Actions	External Output Activation Video and Audio Recording to Edge Storage File Upload: FTP, Network Share and Email Notification: HTTP, FTP, Email

## Technical Specifications: VandalDome VD-4-IR

General		
Casing	Metal and Plastic	
Power	PoE IEEE802.3af, Class 0 DC 12 V, 2.12 A, max 13.68 W AC 24 V, max 13.68 W	
Connectors	RJ45 Alarm in x4, Alarm out x1, Terminal Block DC12V Terminal Block AC24V Terminal Block Audio in Terminal Block Audio out Terminal Block CVBS Connector	
IR Illumination	Illumination Distance: up to 30 m	
Storage	Support for microSD/microSDHC/microSDXC card Support for Recording to NAS	
Protection Class	IP66/ IK10	
Operating Conditions	-30°C to 65°C (-22°F to 131°F) without Heater -55°C to 65°C (-67°F to 131°F) with Heater 10 % to 90 %, no Condensation	
Storage Conditions	-20°C to 70°C (-4°F to 158°F)	
Approvals	EMC Safety Environment	CE / FCC LVD IP66, IK10
Dimensions	Ø133.8 x 117.4 mm	
Weight	760 g	

