

# QH-3232SC-NU

2.8~12MM MF Fixed Iris Lens, 36LED



**QIHAN**  
Creation for Safe Life



## Feature

- Analog HD, 720P, Long-distance transmission, None-delay, Open standard for good compatibility, Easy operation, High-Integrate for the high-quality reliable transmission.

## Dimensions

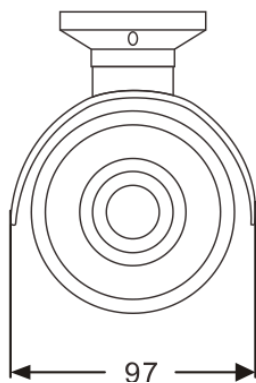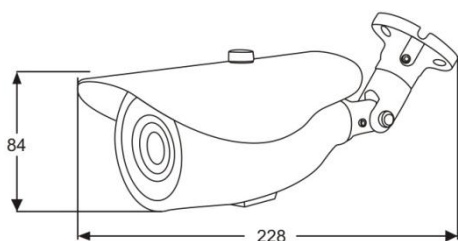

Unit: mm

## Technical Specifications

|                          |                             |
|--------------------------|-----------------------------|
| <b>Model NO.</b>         | <b>QH-3232SC-NU</b>         |
| <b>VIDEO</b>             |                             |
| Image Device             | 1/3" Sony "Exmor" CMOS      |
| TV System                | PAL/NTSC                    |
| Total Pixels             | 1.37M Pixels                |
| Effective Pixels         | 1280 ( H ) *720 ( V )       |
| Scanning System          | Progressive                 |
| Synchronization          | Internal                    |
| Min. Illumination        | 0 Lux (LED on)              |
| S/N Ratio                | >58db                       |
| Video Output             | 1Vp-p, 75ohm, BNC           |
| <b>LENS</b>              |                             |
| Focal Length             | 2.8~12MM MF Fixed Iris Lens |
| <b>OPERATIONAL</b>       |                             |
| Day & Night              | Auto (ICR)                  |
| Backlight Compensation   | Auto                        |
| Gain control             | Auto                        |
| White Balance            | Auto                        |
| Electronic Shutter Speed | 1/50(1/60) ~ 1/100,000S     |
| Infrared LED             | 36LEDs                      |
| IR Distance              | 20~30m                      |
| IR-CUT                   | YES                         |
| Infrared Spectrum        | 850nm                       |
| <b>OPERATIONAL</b>       |                             |
| Operation Temperature    | -10℃ ~ +60℃                 |
| Storage Temperature      | -20℃ ~ +70℃                 |
| Water-proof Casing       | IP66                        |
| <b>ELECTRICAL</b>        |                             |
| Max Power                | 6.06W                       |
| Adapter Requirement      | DC12V1A                     |
| <b>MECHANICAL</b>        |                             |
| Color                    | White                       |
| Dimensions               | 228*97*84MM                 |
| Net Weight               | 515g/pcs                    |
| Transmission distance    | 500meters(75-3)             |