

H.264 Digital Video Recorder

RL-HD-VR-6904HB



Product Features

➤ Real-time monitoring

With composite video signal interface, support TV, VGA, or HDMI output simultaneously.

➤ Compression processing functions

H.264 video compression standard and G.711 audio compression standards.

➤ Supports timer, alarm linkage, motion detection recording mode and also support the SATA HDD and the Local HDD S.M.A.R.T.R technology. Besides, the records support the USB interface to backup and the network backup function

➤ Records playback function

Support video search by a variety of conditions, to realize the Local and Network playback; Support many channels playback with quick、slow、reverse and frame by frame mode at the same time; The actual time can display when the record playback

➤ Camera manage and alarm

Support manage the camera remotely: All kinds of alarm device can connect with many channels alarm input interface; Support motion detection、video loss、video shelter alarms; Support the alarm joint and the light control with many channels alarm output

➤ Communication interface

Support many kinds of backup devices with high speed USB2.0 interface or SATA interface; Support plug and play in all kinds of network with standard Ethernet interface

➤ Network function


Support the TCP/IP、UDP、RTP/RTSP、DHCP、PPPoE、DDNS、NTP protocol; Support the live monitor, record playback, manage function; Support the direct access from browser with the built-in WEB Server

Specification

	Model	RL-HD-VR-6904HB
System	CPU	GM8286
	Operating System	Linux
Video	Video Compression	H.264
	Preview	1080P
	Record Resolution	1080P
	Playback Resolution	1080P
	Synchronous Playback	1*1080P
	Video input	4CH BNC
	Video output	1 * CVBS, 1 * VGA ,1 * HDMI
Audio	Audio Compression	8k 16bit; 16kbps
	Audio input	4*RCA
	Audio output	1*RCA
External Alarm	Alarm External	support
PTZ	485 Port	1
Input Control	Mouse	Support
Storage and Back-up	SATA port	support
	Esata	nonsupport
	DVD-RW driver	1*4TB
USB	USB 2.0 port	2
power consumption	power	DC12V/2A
	wattage	5W
Remote monitoring	Mobile monitor	iPhone, Android
	Voice talk-back	nonsupport

	Network	1 RJ45 10M/100M
Other	operating temperature	-20°C~+55°C
	Dimension	
	Weight	

Dimension

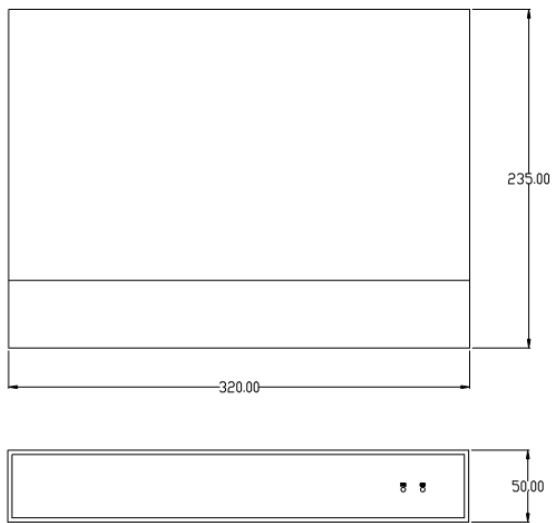

Rear Side

