


35x (ICR) Auto Focus Zoom Camera



Features

- Sony EX-View HAD CCD sensor
- 35x optical zoom, 16x digital zoom
- Day & Night (IR-Cut filter Removable, ICR)
- On Screen Display (OSD) set-up menu
- Built-in 5 keys to control zooming, focusing function and set-up menu adjustment
- Support functions: AI, AWB, AGC, BLC, FL, Positive / Negative, Auto Focus, Audio function
- Support YOKO / PELCO D&P / LG protocol

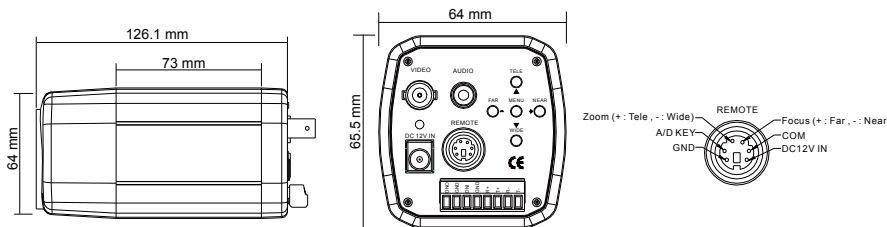

Option :



RYK-8340
Wire Remote Controller



RYK-8505L
IR Housing

Model Name	RYK-AF301A	RYK-AF302A
Image Device	1/4" Color Sony EX-View HAD (Hi-Res.)	1/4" Color Sony EX-View HAD (WDR, Hi-Res.)
Picture Elements	NTSC:768x494, PAL:752x582	
Resolution	470 TVL	
Min. Illumination	0.01 Lux (Night / BW), 0.5 Lux (Day / Color) / F1.6	
S/N Ratio	More than 48dB	
Electronic Shutter	NTSC:1/60~1/30,000, PAL:1/50~1/30,000	NTSC:1/60~1/50,000, PAL:1/50~1/50,000
Flickerless Mode	On / Off (NTSC:1/100, PAL:1/120)	
Iris Control	Auto / Manual	
Lens Furnished	35x (ICR) Auto Focus Zoom (3.6~126mm / F1.6~4.2), Video AF	
Digital Zoom Ratio	Basic 16x (Total Zoom Ratio 560x), 2x~16x variable	Basic 10x (Total Zoom Ratio 350x), 2x~10x variable
Min. Shutting Distance	0.01m (WIDE), 1.5m (TELE)	
Camera Control	RS-485 / RS-422 (option: RS-232)	
Remote Control	6-pin Circular Connect: Zoom, Focus, A/D key, DC12V IN	
Key Control	Tele (Up), Wide (Down), Near (+), Far (-), Menu	
Protocol	YOKO / PELCO D&P / LG	
Zoom Speed	8 / 11 / 14 sec mode	Slow / Normal / High
Zoom / Focus Preset	128 preset points	
Focus Mode	Auto / Manual / Push Auto	
On Screen Display	Set-up menu	
Negative / Positive	On / Off	
Wide Dynamic Range (WDR)	—	On / Off
Day & Night (ICR)	AE / Sensor / Day / Night / External	
Day & Night Control	Day & Night output / Day & Night External input	
Brightness Control	Manual	
Wide Burst	On / Off	—
White Balance	Auto / Hue / Indoor / Outdoor / Manual / Push Auto	
Gain Control	Auto / Manual	
Motion Detection	—	On / Off
Privacy Masking	—	8 free areas (Area size adjustable)
Back Light Comp.	On / Auto (Center / Up / Down / Left / Right) / Super / Off	
Sync. System	Internal	
Video Output	1 Vp-p / 75 Ohms	
Audio Output	2 Vp-p / 50 Ohms	—
Power Supply	DC12V ±10%	
Power Consumption	340mA max.	440mA max.
Operating Temp.	-10°C ~ 50°C	