


H.264 4ch 960H / 4CIF Video Server


RYK-VS410

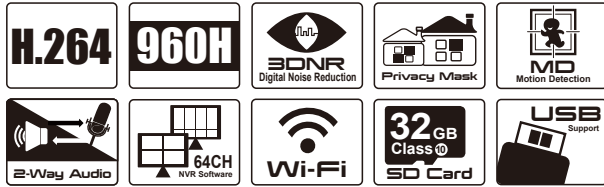

Features

- H.264 Compression
- 4 Channel Video Recording
- Backup Recording
- RS485 Support PELCO D/P
- DC 12V 2A Output
- 2-Way Audio
- 4 x Digital I/O
- VGA Output
- SD Card Slot
- Free 64CH NVR Software
- USB External Wifi Dongle Support

Dimensions

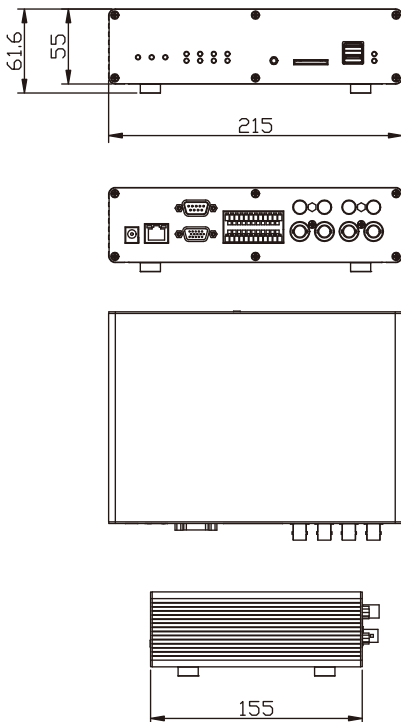

Specifications

Model No.	RYK-VS410
VIDEO	
Video Compression	H.264
Video Streaming	Dual Streaming
Resolutions / Frame Rate	960 x 576 (PAL) @ 25fps x 4ch
Image Settings	Brightness, Contrast, Sharpness, Saturation, Hue
Flip & Mirror	Support
DNR	Support
De-Interlace Filter	3D Noise Filter
Video Input	BNC x 4
Video Output	VGA (D-SUB) X 1
AUDIO	
Audio Compression	AMR/ AAC
Audio Streaming	Two-Way, Full Duplex, Half Duplex
Audio Input	Type F Connector Coaxial Cable Line x 4 (Line In)
Audio Output	3.5 Phone Jack X 1
NETWORK	
Ethernet	RI-45 10BASE-T/100BASE-TX/1000BASE-T
Protocol	IPv4, TCP/IP, HTTP, RTSP/RTMP/RTCP, 3GPP, IGMP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, Bonjour
Security	Password Protection, IP Address Filtering, HTTPS Encryption, Digest Authentication, User Access Log
Wireless	Support USB External Wifi Dongle
EVENT/ALARM	
Motion detection	Support (3Areas)
D/I & D/O	4 & 4 (Dry Contact)
Alarm events	File Upload Via FTP, HTTP And Email, Notification Via Email, HTTP And TCP, External Output Activation
Event List	Support
RECORDING	
Recording Format	MP4
SD	SD/SDHC Class10 32G
WEB Playback	Support
GENERAL	
RS485	Support (Pelco D/P)
RS232	Support (STD Serial Port)
USB	USB 2.0 X 2
Casing	Metal Casing
Power	DC 12V
Dimensions	215 x 55 x 155 mm
Weight	1300g
Operating conditions	0°C~ 60°C
Humidity	20 – 80% RH (Non-Condensing)
Approvals	CE / FCC / BSMI / CCC

*Design and specification are subject to change without notice.