

Vigor2200USB DSL Router



- Host USB Port connects directly to USB ADSL Modem
- Built-in Firewall to increase system security
- VPN (Virtual Private Network) with IPsec encryption
- Call Scheduling for server build and Internet connection control
- IP Posting, for Dynamic DNS service
- Routing Information Protocol (RIP) & Static Routing support
- Domain Name Server (DNS) Proxy
- DMZ (De-Militarized) Host support
- DHCP Server facility for your network
- Network Address Translation (NAT)
- Online Status Monitor
- Easy configuration and monitoring from your web browser
- 4-Port 10/100BaseT Ethernet Switch
- Future expansion possibilities for other USB peripherals

VPN

IPSec

Firewall

Ethernet
Switch

IP
Sharing


DMZ

PPPoE

PPPoA



DrayTek

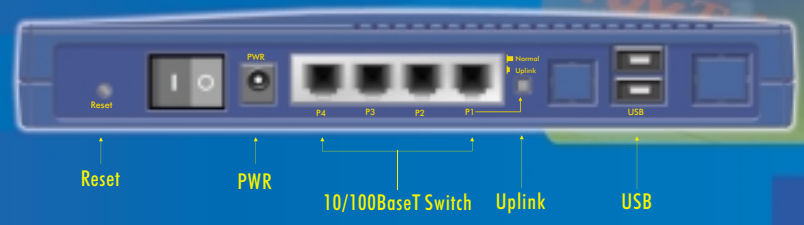

Vigor2200USB DSL Router

USB

USB Function

- Two USB ports supported
- PPPoE/PPPoA and LLC/VcMux type supported
- Easy Tool guides you through the 'USB DSL modem' firmware installation. In a few clicks you will be up and running Vigor2200USB.
- DSL modem support : Alcatel Speed Touch USB DynaMite USB modem

Router

IP Routing Protocol:

- RIP version II

Firewall built-in:

- IP-based Packet filtering with web-based configuration
- IP Antispoofing

Network Features:

- VPN (Virtual Private Network) with IPsec encryption: enables linking of remote Networks via the Internet through authenticated and secure tunnels.
- DDNS (Dynamic DNS) function for posting WAN IP address to DDNS providers.
- Call Scheduler function to activate/deactivate WAN connection by time schedules.
- Built-in four-port 10/100 Base-TX Ethernet Switch with four RJ-45 connectors
- ARP, IP, ICMP, TCP, UDP
- DHCP server for AutoIP: Automatic and Dynamic assign appropriate IP network configuration including IP address, netmask, gateway IP address, domain name server (DNS), IP address etc.
- NAT (Network Address Translation) server : IP address and port number translation Port redirection to expose internal server to the Internet

- DNS (Domain Name System) cache and proxy
- DMZ (De-Militarized Zone) supported

Configuration and Management :

- Web-based User Interface (WUI) Ease-of-use configuration via generic Web browser System status monitor System administrator password support
- Telnet-based teletype user interface (TUI) Text-based command line System administrator or password support
- Smart Start Wizard running on Windows and Mac OS platform
- Diagnosis tools
- SNMP based network management

Operating System Compatibility:

- Windows 95/98/ME/NT/2000
- Mac OS
- Linux or other UNIX clone

Firmware upgradeability:

- TFTP

Dimensions(cm):

L 21.8 x W 15.8 x H 3.6

Weight:

390 grams

Maximum Power:

10 W

VPN

IPSec

Firewall

Ethernet Switch

IP Sharing

DMZ

PPPoE

PPPoA



Type approvals : fulfills the requirement of EU directives

Warranty : 2-year warranty

Support : via local distribution channels, DrayTek Web, Internet, and faxline

DrayTek

Taiwan

www.draytek.com.tw

Tel: 886 35 160 018

Fax: 886 35 160 019

email : info@draytek.com.tw

Trademarks and brand names are the properties of their respective owners. The scope of delivery and other details are subject to change without prior notice.