

AW-FET-081A-065


Unmanaged 4xFE PoE + 4xFE Switch




Technical Specifications

Models	AW-FET-081A-065	Transmission Media	
IP Camera Compatibility		10Base T	Cat. 3, 4, 5 UTP/STP
Video Resolution	Megapixel/D1/VGA	100Base TX	Cat. 5, 5e UTP/STP
Video Compression	MJPEG/MPEG-4/H.264/H.265	PoE Function	
Ethernet		Number of PoE Out Ports	4
Fast Ethernet (RJ45)	8	Max. PoE Output Power/per Port	30W
Standards		802.3at/af Standard Compatible	Yes
IEEE 802.3 10-BASE-T (Ethernet)	Supported	Over Current Protection	Supported
IEEE 802.3u 100-BASE-TX (Fast Ethernet)	Supported	Circuit Shorting Protection	Supported
IEEE 802.3x Flow Control (Full-Duplex Flow Control)	Supported	Total PoE Power Budget	60W
IEEE 802.3af Power over Ethernet	Supported	Power Pin Assignment	1/2(+), 3/6(-)
IEEE 802.3at Power over Ethernet Plus	Supported	PoE PD Auto Detection	Yes
Ethernet Performance		General	
MAC Address	1 K	LED Indicators	Power, LAN port x8, PoE port x4
Buffer Memory	64 KB	Power Input	100~240V AC / 50~60Hz
Transmission Method	Store and Forward	Power Consumption	65W
Backplane	1.6 Gbps	Dimensions	280 (L) x 128 (W) x 44 (H) mm
Auto-MDI/MDI-X, Auto-Negotiation	Supported	Weight	1.2 kg
Filtering/Forwarding Rates		Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
10Mbps	14,880 pps	Storage Temperature	-20°C ~ 70°C (-4°F ~ 158°F)
100Mbps	148,000 pps	Humidity	Operating: 10~90% (Non-condensing) Storage: 10~90% (Non-condensing)
		Safety Certifications	CE, C-Tick, FCC, LVD, VCCI
		Accessory	
		Included Accessories	Power cord, QIG, 19" rack mount kit

Dimensions

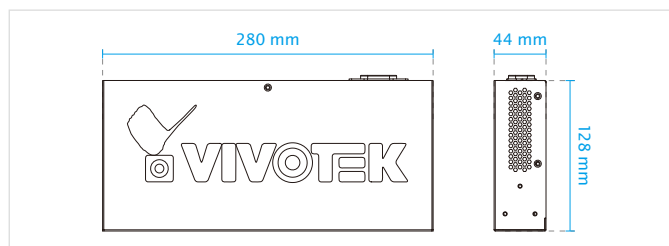

Application Diagram

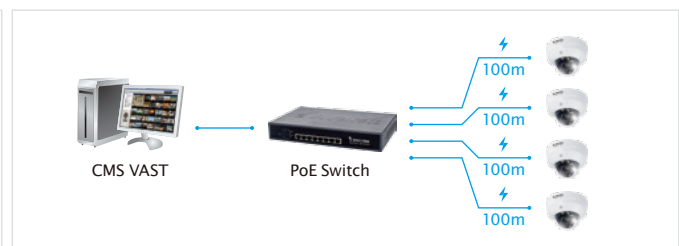

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver 1.4